NEIGHBORHOOD IMPROVEMENT PROGRAM			Fiscal Year: 03/04
Neighborhood: New Monterey Sharon Dwight 375-0841	**Project Title:** Filmore, Irving & Lyndon 700 Drainage		
Type of Work: Catch basins, storm drain pipe and paving	**Scope of Work:** **(design, study, design/const.)** Construction	**Total Estimated Project Cost** $275,000	

FUNDING SUMMARY	
	Amount
Neighborhood Improvement Program Pot **Base Allocation –** New Monterey **Base Allocation** (Other) Aquajito Oaks **Total:**	$274,200 $300 $500 **$275,000**

COMMENTS:
The locations of these projects are in different vicinities, but in close proximity. They were combined in order to save money.

DESCRIPTION OF PROPOSED CONSTRUCTION:
The 700 block of Lyndon will have underground pipes installed and connected to the existing storm drain system at Withers and Irving. The 500 Block of Filmore will be improved by installing a catch basin at the end of Filmore to collect surface runoff and piped to daylight at Hoffman Avenue.

PROJECT PURPOSE/JUSTIFICATION:

Filmore 500 Block

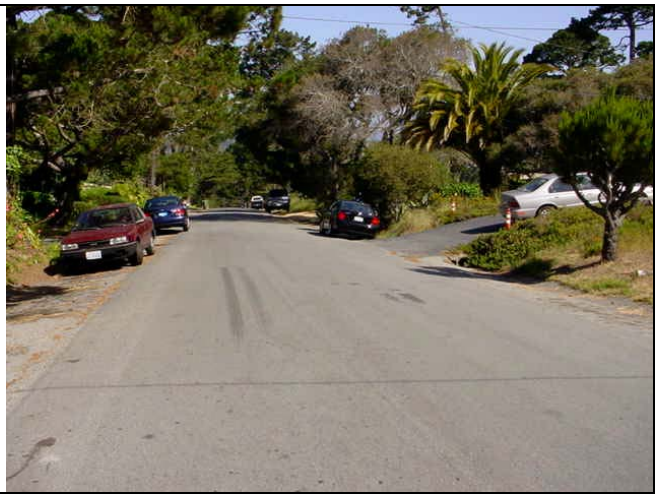

Lyndon 700 Block